

CROWN LINK®

專業薄膜開關連接器第一品牌


ROHS

- ◆ Specifications:
 - Operating Voltage: 50V
 - Current Rating: 0.5A
 - Withstand Voltage: 200V
 - Contact Resistance: 30mΩ
 - Insulation resistance: 500MΩ
 - Operating Temperature: -25°C~+85°C

◆ PART NO.

F0.5 - XXSBDTJ

- MOLD NO.
- TUBE
- DRAWER
- HORIZONTAL BOTTOM CONTACT
- SMT
- CIRCUITS NUMBER 04 TO 60
- 0.5 mm SPACING
- FFC CONNECTOR

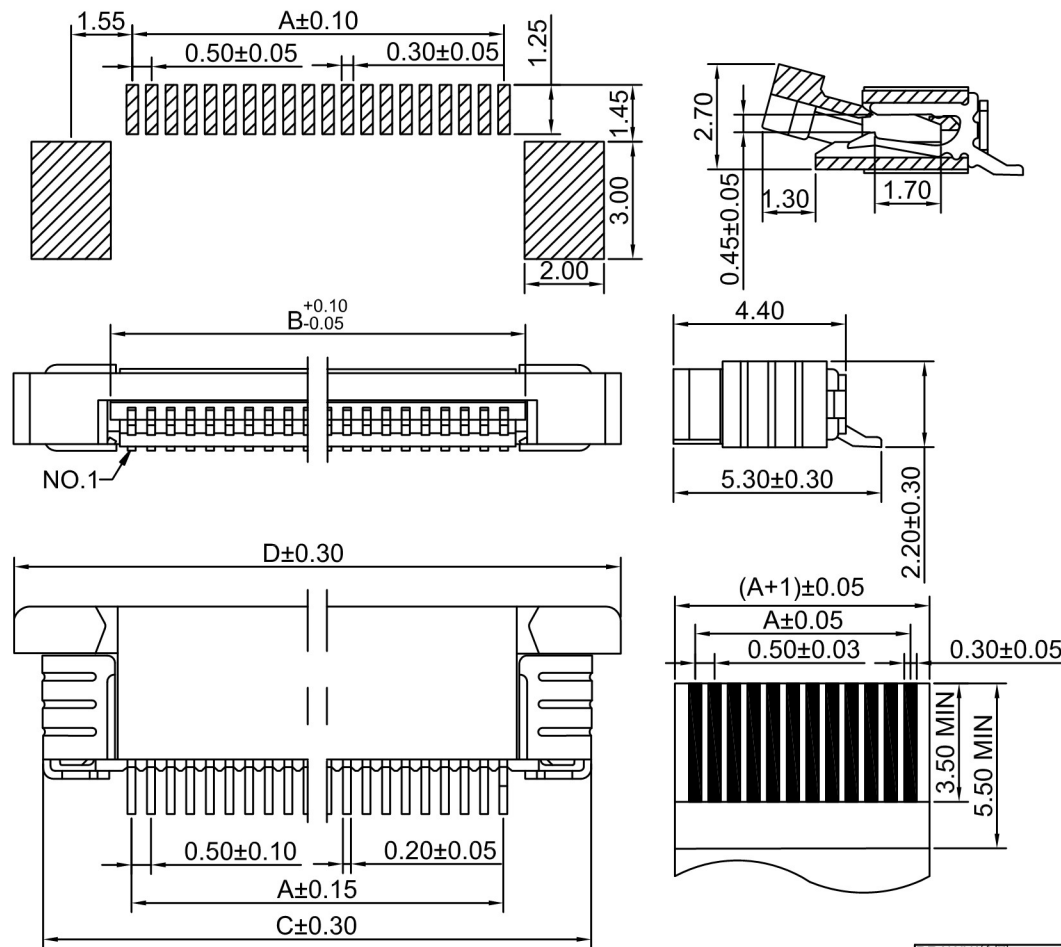

孔位	DIM A	DIM B	DIM C	DIM D	孔位	DIM A	DIM B	DIM C	DIM D	孔位	DIM A	DIM B	DIM C	DIM D
4	1.50	2.60	6.00	7.50	23	11.00	12.10	15.50	17.00	42	20.50	21.60	25.00	26.50
5	2.00	3.10	6.50	8.00	24	11.50	12.60	16.00	17.50	43	21.00	22.10	25.50	27.00
6	2.50	3.60	7.00	8.50	25	12.00	13.10	16.50	18.00	44	21.50	22.60	26.00	27.50
7	3.00	4.10	7.50	9.00	26	12.50	13.60	17.00	18.50	45	22.00	23.10	26.50	28.00
8	3.50	4.60	8.00	9.50	27	13.00	14.10	17.50	19.00	46	22.50	23.60	27.00	28.50
9	4.00	5.10	8.50	10.00	28	13.50	14.60	18.00	19.50	47	23.00	24.10	27.50	29.00
10	4.50	5.60	9.00	10.50	29	14.00	15.10	18.50	20.00	48	23.50	24.60	28.00	29.50
11	5.00	6.10	9.50	11.00	30	14.50	15.60	19.00	20.50	49	24.00	25.10	28.50	30.00
12	5.50	6.60	10.00	11.50	31	15.00	16.10	19.50	21.00	50	24.50	25.60	29.00	30.50
13	6.00	7.10	10.50	12.00	32	15.50	16.60	20.00	21.50	51	25.00	26.10	29.50	31.00
14	6.50	7.60	11.00	12.50	33	16.00	17.10	20.50	22.00	52	25.50	26.60	30.00	31.50
15	7.00	8.10	11.50	13.00	34	16.50	17.60	21.00	22.50	53	26.00	27.10	30.50	32.00
16	7.50	8.60	12.00	13.50	35	17.00	18.10	21.50	23.00	54	26.50	27.60	31.00	32.50
17	8.00	9.10	12.50	14.00	36	17.50	18.60	22.00	23.50	55	27.00	28.10	31.50	33.00
18	8.50	9.60	13.00	14.50	37	18.00	19.10	22.50	24.00	56	27.50	28.60	32.00	33.50
19	9.00	10.10	13.50	15.00	38	18.50	19.60	23.00	24.50	57	28.00	29.10	32.50	34.00
20	9.50	10.60	14.00	15.50	39	19.00	20.10	23.50	25.00	58	28.50	29.60	33.00	34.50
21	10.00	11.10	14.50	16.00	40	19.50	20.60	24.00	25.50	59	29.00	30.10	33.50	35.00
22	10.50	11.60	15.00	16.50	41	20.00	21.10	24.50	26.00	60	29.50	30.60	34.00	35.50

				一般公差 ±0.2 TOLERANCE RANGE/公差範圍
A	FIRST DRAWING	UNA	2019.06.24	
REV/版本	MODIFIED CONTENT /變更內容	DRAWN/繪圖	DATE/日期	

DRAWN/繪圖	DATE/日期
UNA	2019.06.24
CHECK BY/審查	DATE/日期
JASON	2019.06.24
APPROVED BY/核准	DATE/日期
WENDY	2019.06.24
PACKAGE/包裝	TUBE

CROWN LINK® THE LEADING MANUFACTURER OF FPC & FFC CONNECTOR, HOUSING AND DOME.				
PRODUCT NAME/品名 0.5mm FPC/FFC CONNECTOR				
PART NO./料號	PIN NUMBER/針數	SCALE/比例	SIZE/圖號	UNIT/單位
F0.5-XXSBDTJ	04-60		A4	mm
MATERIAL/材質	COLOR/顏色	ANGLE OF VIEW/視角	SHEET/頁碼	REV/版本
PA6T UL94V-0 COPPER ALLOY	BLACK COLOR		1 OF 1	A