

4

3


2

1

# CROWN LINK<sup>®</sup>


專業薄膜開關連接器第一品牌

RoHS

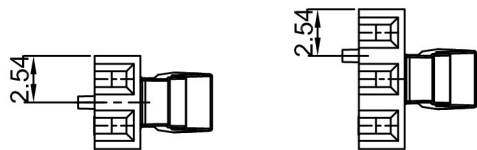


2 PIN

3 PIN




14.00

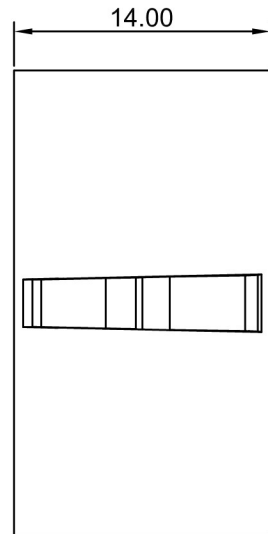

14.00

A

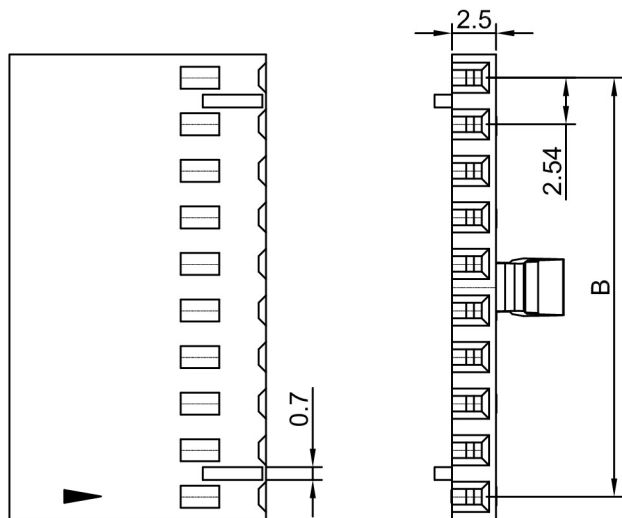


2.5

2.54

B

0.7



- ◆ FOR 2811 SERIES CONNECTOR
- ◆ SPECIFICATIONS
  - VOLTAGE RATING: 250 VAC RMS
  - CURRENT RATING: 2A
  - INSULATION RESISTANCE: 500 MΩ MIN
- ◆ ENVIRONMENTAL
  - TEMPERATURE RANGE: -25°C~+85°C
- ◆ DIMENSION: N=CIRCUIT NO.
  - A=2.54\*N
  - B=2.54\*(N-1)

◆ PART NO.  
 2802HL - XXN  
 SERIES NO. NO LOGO.  
 CIRCUITS NUMBER 02 TO 17

|        |                        |          |            |            |
|--------|------------------------|----------|------------|------------|
|        |                        |          |            | 一般公差 ± 0.2 |
| A      | FIRST DRAWING          | MARY     | 2015.07.21 |            |
| REV/版本 | MODIFIED CONTENT /變更內容 | DRAWN/繪圖 | DATE/日期    |            |

TOLERANCE RANGE/公差範圍

|                |  |  |               |                  |          |         |  |  |
|----------------|--|--|---------------|------------------|----------|---------|--|--|
| DRAWN/繪圖       | DATE/日期  | <b>CROWN LINK<sup>®</sup> THE LEADING MANUFACTURER OF FPC &amp; FFC CONNECTOR, HOUSING AND DOME.</b> |               |                  |          |         |  |  |
| MARY           | 2015.07.21                                       | PRODUCT NAME/品名  |               |                  |          |         |  |  |
| CHECK BY/審查    | DATE/日期  | 2.54mm PITCH HOUSING FOR FFC/FPC   |               |                  |          |         |  |  |
| VIVIAN         | 2015.07.21                                       | PART NO./料號  | PIN NUMBER/針數 | SCALE/比例         | SIZE/圖號  | UNIT/單位 |  |  |
| APPROVED BY/核准 | DATE/日期  | 2802HL-XXN   | 02-17 PIN     | 3:1              | A4       | mm      |  |  |
| JASON          | 2015.07.21                                       | MATERIAL/材質  | COLOR/顏色      | ANGLE OF VIEW/視角 | SHEET/頁碼 | REV/版本  |  |  |
| PACKAGE/包裝     | 02-06 PIN 1,000 PCS/BAG<br>07-17 PIN 500 PCS/BAG | PA66 UL 94V-0  | BLACK COLOR   | ⊕                | 1 OF 1   | A       |  |  |

D

D

C

C

B

B

A

A