CROWNLINK®

專業薄膜開關連接器第一品牌

RoHS

0T:TIN PLATED

0G:GOLD PLATED

HG:SELECTIVE GOLD PLATED



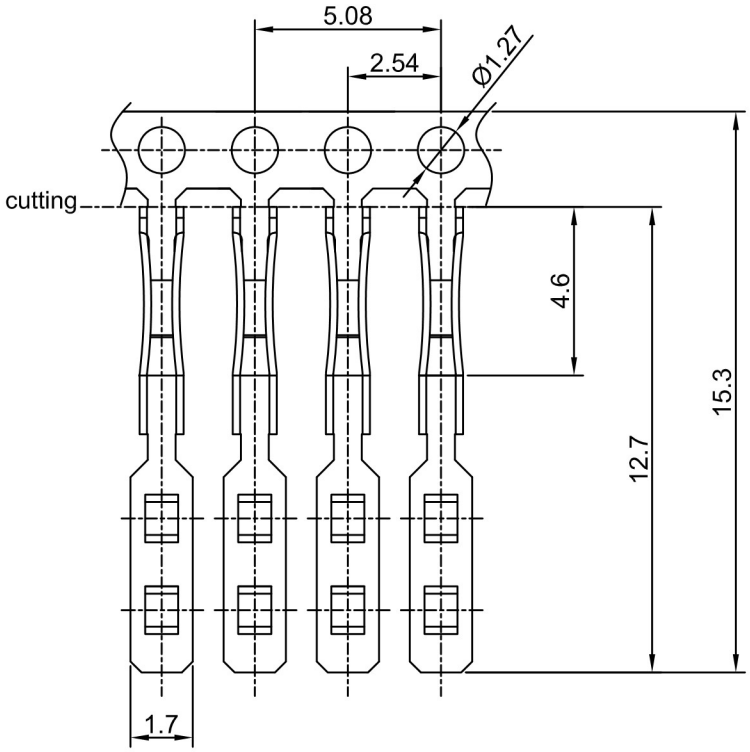

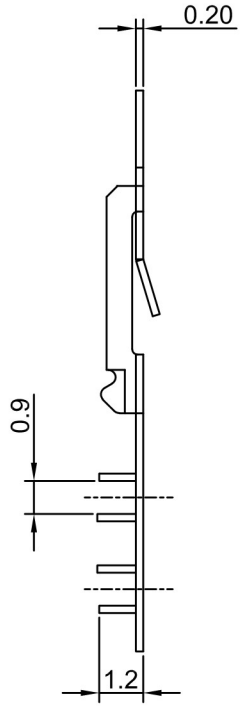

◆ FOR 2802 SERIES HOUSING

◆ SPECIFICATIONS

VOLTAGE RATING：250 VAC RMS

CURRENT RATING：3 AMP

DIELECTRIC WITHSTANDING VOLTAGE：

AC 250V FOR 1 MINUTE

INSULATION RESISTANCE：500 MΩ

◆ ENVIRONMENTAL

TEMPERATURE RANGE：-40°C~+105°C

◆ PART NO.

2802 - 30K - 0T(0G/HG) - F

- 2802 - SERIES NO.
- 30K - 30K/REEL
- 0T(0G/HG) - 0T:TIN PLATED / 0G:GOLD PLATED / HG:SELECTIVE GOLD PLATED / OTHER PLATINGS ON REQUEST
- F - FEMALE

REV/版本	MODIFIED CONTENT /變更內容	DRAWN/繪圖	DATE/日期
B	NEW DRAWING FORMAT	TRACY	2015.08.06
A	FIRST DRAWING	ANNIE	2012.07.18

TOLERANCE RANGE/公差範圍

X.	±0.20
.X	±0.10
.XX	±0.05

DRAWN/繪圖	TRACY	DATE/日期 2015.08.06
CHECK BY/審查	VIVIAN	DATE/日期 2015.08.06
APPROVED BY/核准	JASON	DATE/日期 2015.08.06
PACKAGE/包裝		30,000PCS/REEL

CROWNLINK® THE LEADING MANUFACTURER OF FPC & FFC CONNECTOR，HOUSING AND DOME.

PRODUCT NAME/品名: 2.54mm PITCH FFC/FPC CONNECTOR

PART NO./料號	SCALE/比例	SIZE/圖號	UNIT/單位
2802-30K-0T(0G/HG)-F	5:1	A4	mm

MATERIAL/材質	ANGLE OF VIEW/視角	SHEET/頁碼	REV/版本
PHOSPHOR BRONZE		1 OF 1	B