

4

3

2



1

CROWN LINK®

專業薄膜開關連接器第一品牌



ROHS

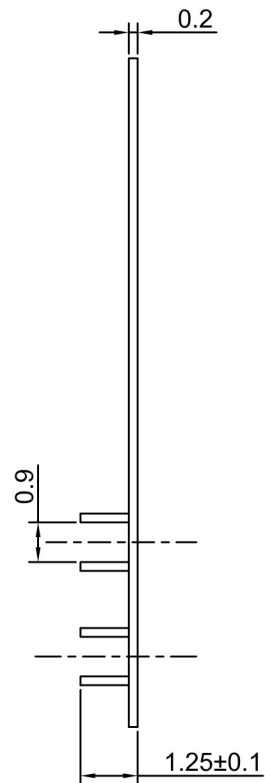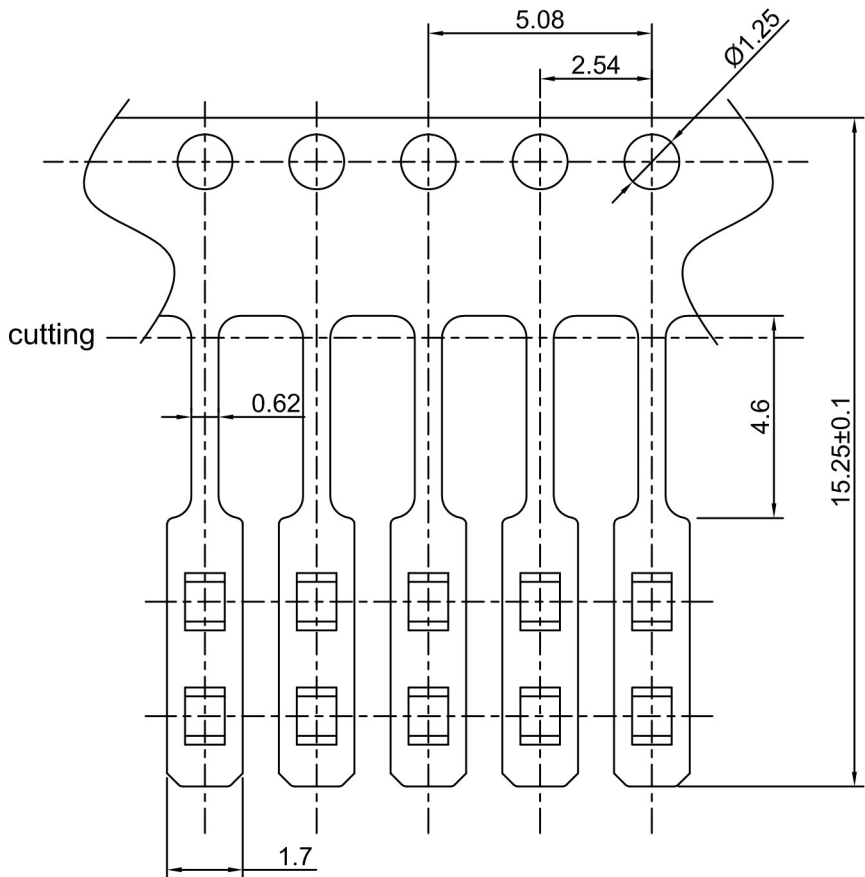

0T:TIN PLATED

◆ SPECIFICATIONS

VOLTAGE RATING: 250 VAC RMS

CURRENT RATING: 3 AMP

DIELECTRIC WITHSTANDING VOLTAGE:

AC 250V FOR 1 MINUTE

INSULATION RESISTANCE: 500 MΩ

◆ ENVIRONMENTAL

TEMPERATURE RANGE: -40°C~+105°C

◆ PART NO.

2808 - 30K - 0T - M

SERIES NO.

30K/REEL

MALE

0T:TIN PLATED

OTHER PLATINGS ON REQUEST

A

				X. ±0.20
				.X ±0.10
B	SIZE CORRECTION	MARY	2018.01.03	.XX ±0.05
REV/版本	MODIFIED CONTENT /變更內容	DRAWN/繪圖	DATE/日期	TOLERANCE RANGE/公差範圍

DRAWN/繪圖	DATE/日期	CROWN LINK® THE LEADING MANUFACTURER OF FPC & FFC CONNECTOR, HOUSING AND DOME.			
MARY	2018.01.03	PRODUCT NAME/品名 2.54mm PITCH FFC/FPC CONNECTOR			
CHECK BY/審查	DATE/日期	PART NO./料號	SCALE/比例	SIZE/圖號	UNIT/單位
VIVIAN	2018.01.03	2808-30K-0T-M	6:1	A4	mm
APPROVED BY/核准	DATE/日期	MATERIAL/材質	ANGLE OF VIEW/視角	SHEET/頁碼	REV/版本
JASON	2018.01.03	PHOSPHOR BRONZE	⊕	1 OF 1	B
PACKAGE/包裝	30,000PCS/REEL				

A