

4

3


2

1

CROWN LINK®

專業薄膜開關連接器第一品牌

RoHS

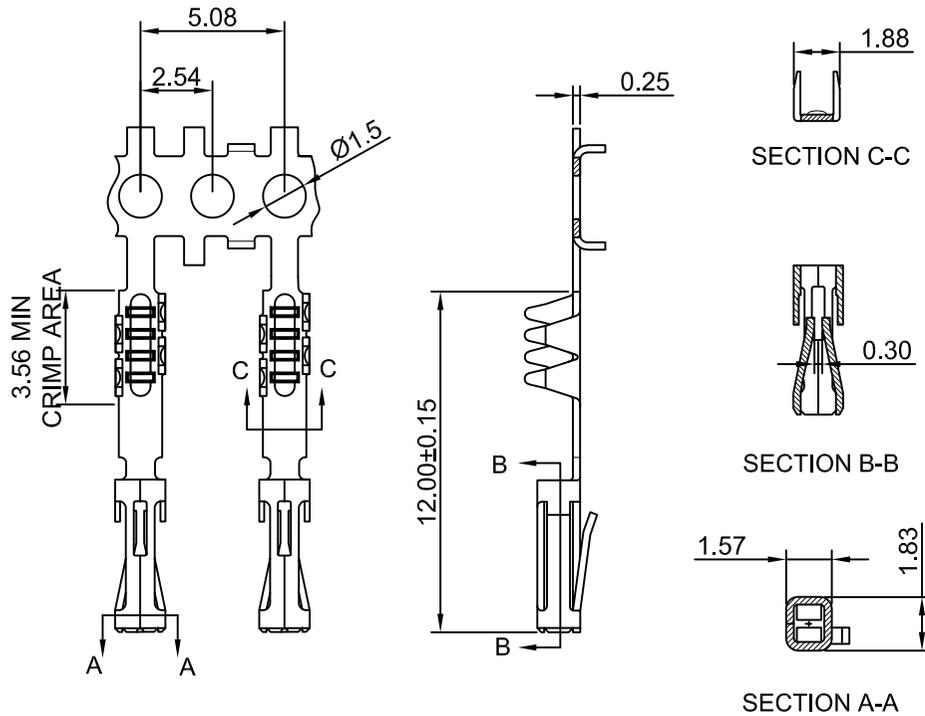

◆FOR 2806 SERIES HOUSING

◆SPECIFICATIONS

VOLTAGE RATING: 250 VAC RMS

CURRENT RATING: 3 AMP

DIELECTRIC WITHSTANDING VOLTAGE:

AC 250V FOR 1 MINUTE

INSULATION RESISTANCE: 500 MΩ

◆ENVIRONMENTAL

TEMPERATURE RANGE: -40°C~+105°C

◆PART NO.

2806P - 10K - 0T(0G/MT/MHG/) - FL

SERIES NO.

FEMALE

10K/REEL

0T:TIN PLATED
 0G:GOLD PLATED
 MT:MATTE TIN PLATED
 MHG:MATTE SELECTIVE GOLD PLATED
 OTHER PLATINGS ON REQUEST

				X. ±0.20
				.X ±0.10
				.XX ±0.05
REV/版本	MODIFIED CONTENT /變更內容	DRAWN/繪圖	DATE/日期	TOLERANCE RANGE/公差範圍

DRAWN/繪圖 JUDY	DATE/日期 2024.12.07	CROWN LINK® THE LEADING MANUFACTURER OF FPC & FFC CONNECTOR, HOUSING AND DOME.			
CHECK BY/審查 VIVIAN	DATE/日期 2024.12.07	PRODUCT NAME/品名 5.08mm PITCH FFC/FPC CONNECTOR			
APPROVED BY/核准 WENDY	DATE/日期 2024.12.07	PART NO./料號 2806P-10K-0T(0G/MT/MHG)-FL	SCALE/比例 4:1	SIZE/圖號 A4	UNIT/單位 mm
PACKAGE/包裝	10,000PCS/REEL	MATERIAL/材質 PHOSPHOR BRONZE	ANGLE OF VIEW/視角 	SHEET/頁碼 1 OF 1	REV/版本 B