

4

3





2

1

# CROWN LINK®

專業薄膜開關連接器第一品牌

ROHS

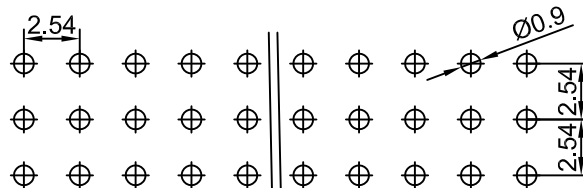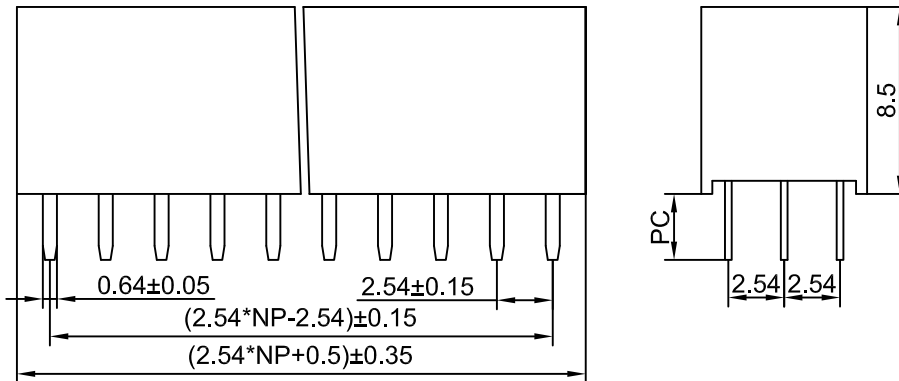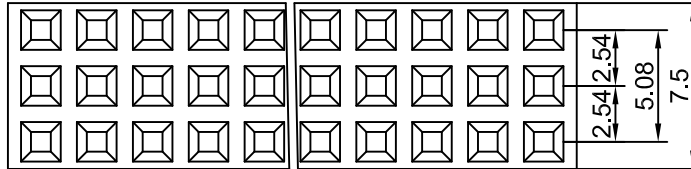

PCB LAYOUT

### ◆ Specifications

- 1.Current Rating:3Amps
- 2.Insulation Resistance:1000 MΩ min
- 3.Dielectric withstanding Voltage: AC 500V
- 4.Contact Resistance:30m Ω max
- 5.Operating Temperature:-25℃ to+85℃
- 6.Contact Material: Brass
- 7.Insulation Material:As follows
- 8.Plated: As follows

### ◆ PART NO.

L309 8 5 -XX 0 X X XX X

2.54mm three row	PLASTIC HEIGHT HW	PIN NO. 1~40	0=180° 1=90° 2=SMT	MATERIAL	PLATED	SERIES NO.	PACKAGE
85=8.5*7.5				1、PBT 3、NY6T 4、LCP 5、NY66 7、NY46 8、NY9T	0、Au0.8u" 1、Au1u" 2、Au1.5u" 3、Au2u" 4、Au3u" 5、Au5u" 6、Au10u" 7、Selective gold 8、Tin 9、Matte-Tin	01~68:Without a column 70~89:With inside column 90~99:With outside column	A=bag B=tubes C=tray D=reel

A

REV/版本	MODIFIED CONTENT /變更內容	DRAWN/繪圖	DATE/日期	TOLERANCE RANGE/公差範圍
A	FIRST DRAWING	MARY	2017.08.24	LINER ANGLES .0 ±0.30 0.° ±2° .00 ±0.20 .0° ±1° .000 ±0.10 .00° ±0.5°

DRAWN/繪圖	DATE/日期	CROWN LINK® THE LEADING MANUFACTURER OF FPC & FFC CONNECTOR, HOUSING AND DOME.			
MARY	2017.08.24	PRODUCT NAME/品名 PH2.54×8.9 3×NP 180° THREE ROW FEMALE HEADER TYPE-Y			
CHECK BY/審查	DATE/日期	PART NO./料號	PIN NUMBER/針數	SCALE/比例	SIZE/圖號
VIVIAN	2017.08.24	L30985-XX0XXXXX	03P-120P		A4
APPROVED BY/核准	DATE/日期	MATERIAL/材質	COLOR/顏色	ANGLE OF VIEW/視角	UNIT/單位
WENDY	2017.08.24		BLACK COLOR	⊕	mm
PACKAGE/包裝					SHEET/頁碼
					1 OF 1
					REV/版本
					A

A