

4

3






2

1

CROWN LINK[®]

專業薄膜開關連接器第一品牌

ROHS

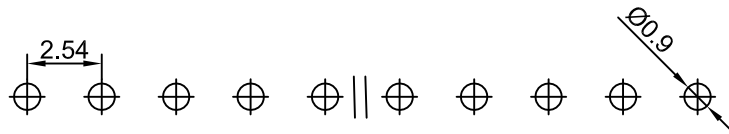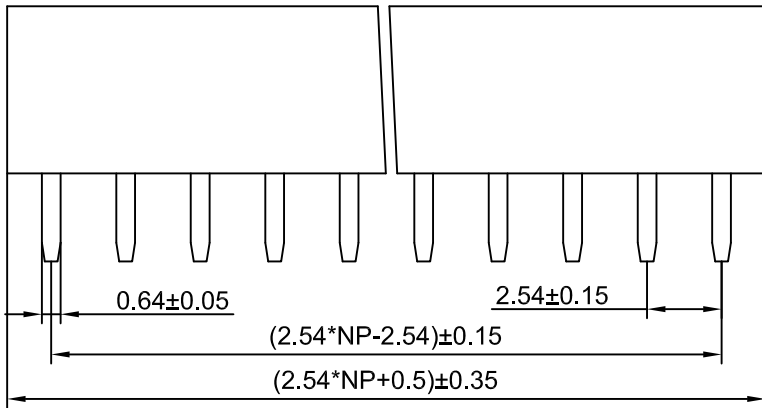

◆ Specifications

- 1.Current Rating:3Amps
- 2.Insulation Resistance:1000 MΩ min
- 3.Dielectric withstanding Voltage: AC 500V
- 4.Contact Resistance:30 mΩ max
- 5.Operating Temperature:-25℃ to+85℃
- 6.Contact Material: Brass
- 7.Insulation Material:As follows
- 8.Plated: As follows

◆ PART NO.

L307 X X -XX 0 X X XX X

2.54mm single row	PLASTIC HEIGHT HW	PIN NO. 01~40	0=180° 1=90° 2=SMT	MATERIAL 1. PBT 3. NY6T 4. LCP 5. NY66 7. NY46 8. NY9T	PLATED 0. Au0.8u" 1. Au1u" 2. Au1.5u" 3. Au2u" 4. Au3u" 5. Au5u" 6. Au10u" 7. Selective gold 8. Tin 9. Matte-Tin	SERIES NO. 01~69:Without a column 70~89:With inside column 90~99:With outside column	PACKAGE A=bag B=tubes C=tray D=reel
51=5.1*2.6	57=5.7*2.4	71=7.1*2.4	85=8.5*2.4				

PCB LAYOUT

REV/版本	MODIFIED CONTENT /變更內容	DRAWN/繪圖	DATE/日期	TOLERANCE RANGE/公差範圍	ANGLES
A	FIRST DRAWING	MARY	2017.08.22	.00 ±0.2	.0° ±2°
				.0 ±0.3	0.° ±3°
				.000 ±0.1	.00° ±1°

CHECK BY/審查	DATE/日期	PRODUCT NAME/品名	PART NO./料號	PIN NUMBER/針數	SCALE/比例	SIZE/圖號	UNIT/單位
MARY	2017.08.22	PH2.54*H 1xNP 180° SINGLE ROW FEMALE HEADER TYPE-Y	L307XX-XX0XXXXX	01P-40P		A4	mm
VIVIAN	2017.08.22						
WENDY	2017.08.22						
PACKAGE/包裝		MATERIAL/材質	COLOR/顏色	ANGLE OF VIEW/視角	SHEET/頁碼	REV/版本	
			BLACK COLOR		1 OF 1	A	

CROWN LINK[®] THE LEADING MANUFACTURER OF FPC & FFC CONNECTOR, HOUSING AND DOME.