

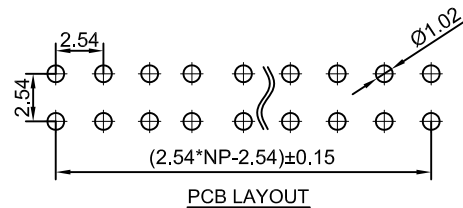
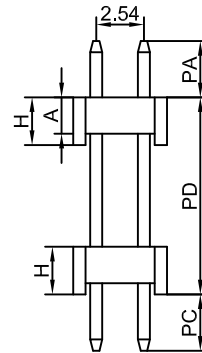


CROWN LINK®

專業薄膜開關連接器第一品牌

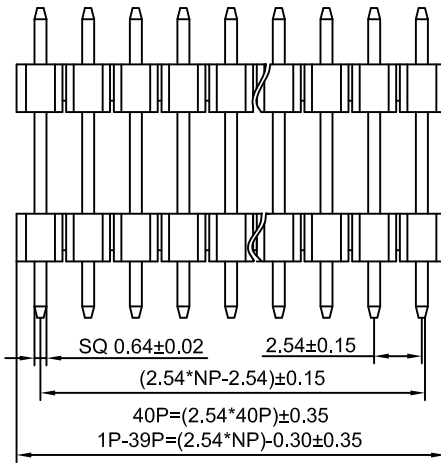

ROHS

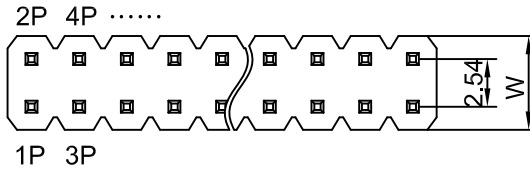

◆ Specifications

- 1.Current Rating:3Amps
- 2.Insulation Resistance:1000 MΩ min
- 3.Dielectric withstanding Voltage: AC 500V
- 4.Contact Resistance:30 mΩ max
- 5.Operating Temperature:-25℃ to+85℃
- 6.Contact Material: Brass
- 7.Insulation Material:As follows
- 8.Plated: As follows

◆ PART NO.

L208 XX -XX 0 X X XX X

| 2.54mm double row | PLASTIC HEIGHT H*W | PIN NO. 1~40 | 0=180° 1=90° 2=SMT | MATERIAL 1、PBT 3、NY6T 4、LCP 5、NY66 7、NY46 8、NY9T | PLATED 0、Au0.8u" 1、Au1u" 2、Au1.5u" 3、Au2u" 4、Au3u" 5、Au5u" 6、Au10u" 7、Selective gold 8、Tin 9、Matte-Tin | SERIES NO. 01~68:Without a column 70~99:With inside column | PACKAGE A=bag B=tubes C=tray D=reel |
|-------------------|--------------------|--------------|--------------------|--|--|--|-------------------------------------|
|-------------------|--------------------|--------------|--------------------|--|--|--|-------------------------------------|

| | | | | | |
|--------|------------------------|----------|------------|----------------------|----------|
| | | | | LINER | ANGLES |
| | | | | .0 ±0.30 | 0.° ±3° |
| A | FIRST DRAWING | MARY | 2017.08.31 | .00 ±0.20 | .0° ±2° |
| REV/版本 | MODIFIED CONTENT /變更內容 | DRAWN/繪圖 | DATE/日期 | .000 ±0.10 | .00° ±1° |
| | | | | TOLERANCE RANGE/公差範圍 | |

| | | | | | | |
|----------------|------------|--|---------------|-------------|------------------|----------|
| DRAWN/繪圖 | DATE/日期 | CROWN LINK® THE LEADING MANUFACTURER OF FPC & FFC CONNECTOR, HOUSING AND DOME. | | | | |
| MARY | 2017.08.31 | PRODUCT NAME/品名 | | | | |
| CHECK BY/審查 | DATE/日期 | PH2.54*H 2xNP 180° DOUBLE ROW DOUBLE PLASTIC PIN HEADER | | | | |
| VIVIAN | 2017.08.31 | PART NO./料號 | PIN NUMBER/針數 | SCALE/比例 | SIZE/圖號 | UNIT/單位 |
| APPROVED BY/核准 | DATE/日期 | L208XX-XX0XXXXX | 02P-80P | | A4 | mm |
| WENDY | 2017.08.31 | PACKAGE/包裝 | MATERIAL/材質 | COLOR/顏色 | ANGLE OF VIEW/視角 | SHEET/頁碼 |
| | | | | BLACK COLOR | ⊕ | 1 OF 1 |
| | | | | | | REV/版本 |
| | | | | | | A |

D

D

C

C

B

B

A

A