

4

3


2

1

# CROWN LINK®



專業薄膜開關連接器第一品牌

ROHS

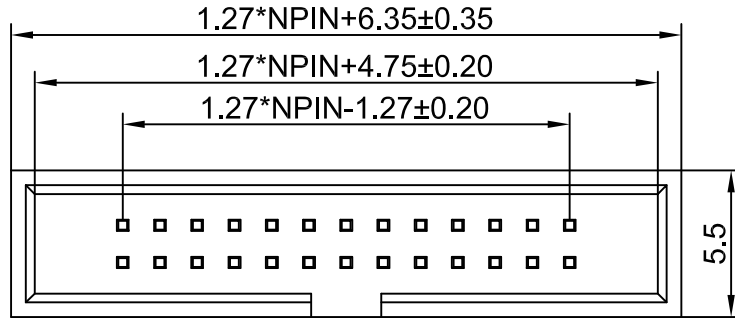


### ◆ Specifications

1. Current Rating: 1Amps
2. Insulation Resistance: 1000 MΩ min
3. Dielectric withstanding Voltage: AC 500V
4. Contact Resistance: 30 mΩ max
5. Operating Temperature: -25°C to +85°C
6. Contact Material: Brass
7. Insulation Material: As follows
8. Plated: As follows

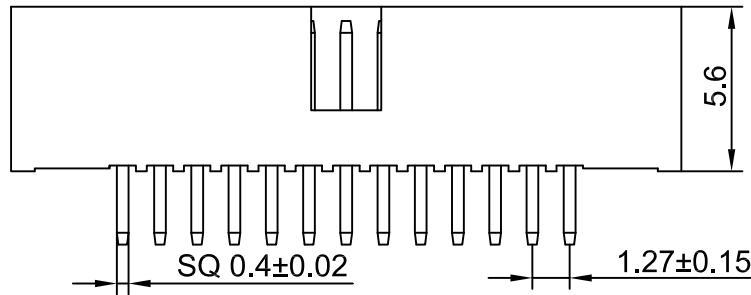

### ◆ PART NO.

L230	56	-XX	0	X	X	XX	X
1.27mm double row	PLASTIC HEIGHT H*W 56=5.6	PIN NO. 1~40	0=180° 1=90° 2=SMT	MATERIAL 1、PBT 3、NY6T 4、LCP 5、NY66 7、NY46 8、NY9T	PLATED 0、Au0.8u" 1、Au1u" 2、Au1.5u" 3、Au2u" 4、Au3u" 5、Au5u" 6、Au10u" 7、Selective gold 8、Tin 9、Matte-Tin	SERIES NO. 01~69: Without a column 70~99: With inside column	PACKAGE A=bag B=tubes C=tray D=reel

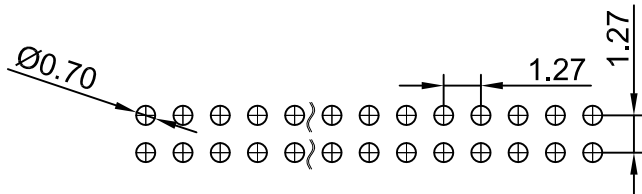

				LINER	ANGLES
				.0 ±0.3	0.° ±2°
A	FIRST DRAWING	MARY	2018.08.24	.00 ±0.2	.0° ±1°
REV/版本	MODIFIED CONTENT /變更內容	DRAWN/繪圖	DATE/日期	.000 ±0.1	.00° ±0.5°
				TOLERANCE RANGE/公差範圍	

DRAWN/繪圖	DATE/日期	<b>CROWN LINK® THE LEADING MANUFACTURER OF FPC &amp; FFC CONNECTOR, HOUSING AND DOME.</b>			
MARY	2018.08.24	PRODUCT NAME/品名 PH1.27X5.6 2XNP 180° BOX HEADER			
CHECK BY/審查	DATE/日期	PART NO./料號	PIN NUMBER/針數	SCALE/比例	SIZE/圖號
VIVIAN	2018.08.24	L23056-XX0XXXXX	02-80P		A4
APPROVED BY/核准	DATE/日期	MATERIAL/材質	COLOR/顏色	ANGLE OF VIEW/視角	SHEET/頁碼
WENDY	2018.08.24		BLACK COLOR		1 OF 1
PACKAGE/包裝					REV/版本
					A

D

D

C

C

B

B

A

A