

4

3


2

1

CROWN LINK®

專業薄膜開關連接器第一品牌

ROHS



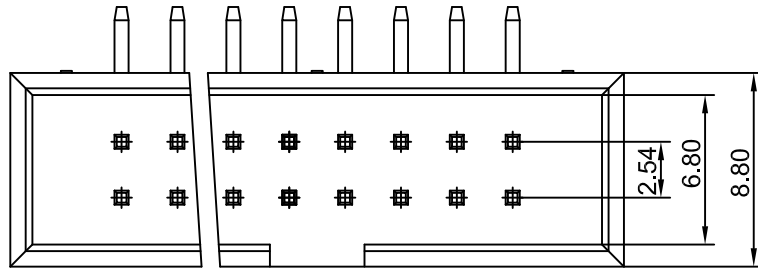


◆ Specifications

1. Current Rating: 3Amps
2. Insulation Resistance: 1000 MΩ min
3. Dielectric withstanding Voltage: AC 500V
4. Contact Resistance: 30 mΩ max
5. Operating Temperature: -25°C to +85°C
6. Contact Material: Brass
7. Insulation Material: As follows
8. Plated: As follows

◆ PART NO.

L232	89	-XX	1	X	X	XX	X
2.54mm double row	PLASTIC HEIGHT H*W 89=8.9*8.8	PIN NO. 1~40	0=180° 1=90° 2=SMT	MATERIAL 1. PBT 3. NY6T 4. LCP 5. NY66 7. NY46 8. NY9T	PLATED 0. Au0.8u" 1. Au1u" 2. Au1.5u" 3. Au2u" 4. Au3u" 5. Au5u" 6. Au10u" 7. Selective gold 8. Tin 9. Matte-Tin	SERIES NO. 01~68: Without a column 70~99: With inside column	PACKAGE A=bag B=tubes C=tray D=reel

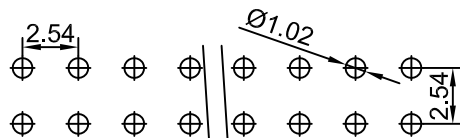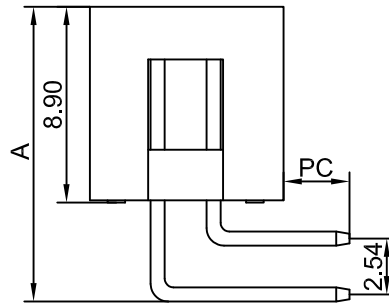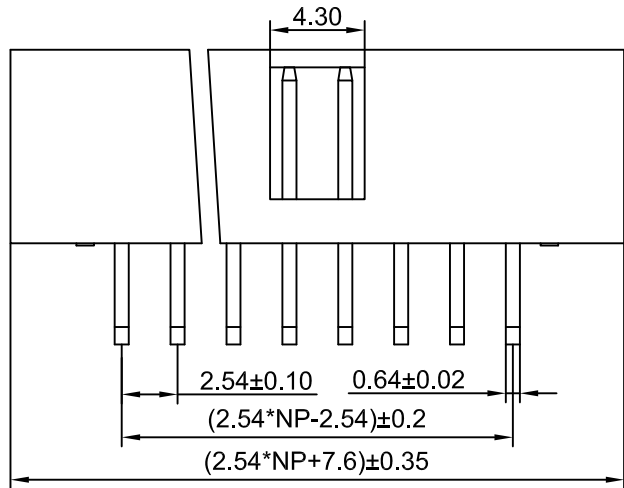

PCB LAYOUT

				LINER	ANGLES
				.0 ±0.3	0.° ±3°
A	FIRST DRAWING	MARY	2017.08.24	.00 ±0.2	.0° ±2°
REV/版本	MODIFIED CONTENT /變更內容	DRAWN/繪圖	DATE/日期	.000 ±0.1	.00° ±1°
				TOLERANCE RANGE/公差範圍	

DRAWN/繪圖	DATE/日期	CROWN LINK® THE LEADING MANUFACTURER OF FPC & FFC CONNECTOR, HOUSING AND DOME.			
MARY	2017.08.24	PRODUCT NAME/品名 PH2.54X8.9 2XNP 90° BOX HEADER			
CHECK BY/審查	DATE/日期	PART NO./料號	PIN NUMBER/針數	SCALE/比例	SIZE/圖號
VIVIAN	2017.08.24	L23289-XX1XXXXX	02-80P		A4
APPROVED BY/核准	DATE/日期	MATERIAL/材質	COLOR/顏色	ANGLE OF VIEW/視角	SHEET/頁碼
WENDY	2017.08.24		BLACK COLOR	⊕	1 OF 1
PACKAGE/包裝					REV/版本 A

D

D

C

C

B

B

A

A