

4

3





2

1

# CROWN LINK®



專業薄膜開關連接器第一品牌

ROHS

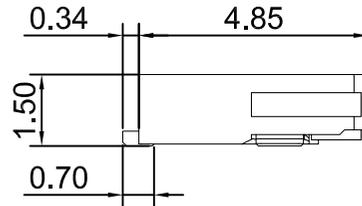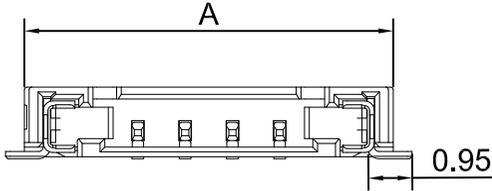

- ◆ FOR 1006H HOUSING
- ◆ SPECIFICATIONS
  - VOLTAGE RATING: 150 V AC/DC
  - CURRENT RATING: 1.5A AC / DC
  - CONTACT RESISTANCE: 20 mΩ MAX
  - INSULATION RESISTANCE: 1000 MΩ MIN
  - WITHSTANDING VOLTAGE: 500V AC / MINUTE
- ◆ ENVIRONMENTAL
  - TEMPERATURE RANGE: -25°C~+85°C

◆ PART NO.  
 CL1006 S - XX S N H  
 SERIES NO. SMT NO LOGO REEL PACKAGE  
 MOLD NO. CIRCUITS NUMBER 02 TO 06

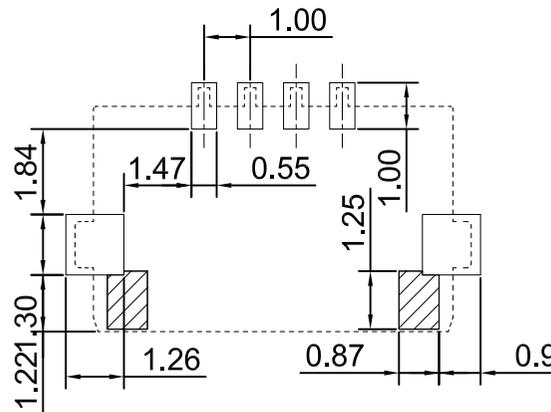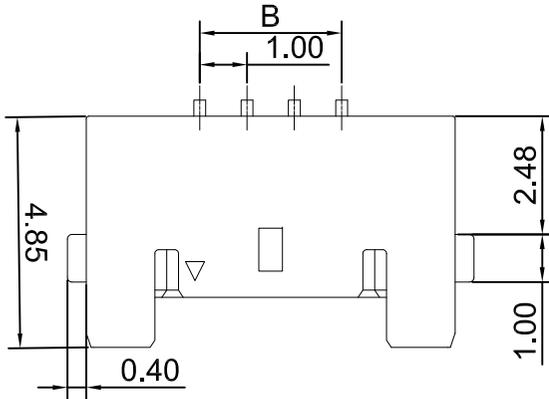

Recommded P.C.B Layout

Part NO.	Dimensions	
	A	B
02	5.80	1.00
03	6.80	2.00
04	7.80	3.00
05	8.80	4.00
06	9.80	5.00

REV/版本	MODIFIED CONTENT /變更內容	DRAWN/繪圖	DATE/日期	TOLERANCE RANGE/公差範圍
				.X ±0.30 .X° ±3° .XX ±0.20 .XX° ±2° .XXX ±0.10 .XXX° ±1°

DRAWN/繪圖	DATE/日期
JUDY	2024.07.04
CHECK BY/審查	DATE/日期
VIVIAN	2024.07.04
APPROVED BY/核准	DATE/日期
WENDY	2024.07.04
PACKAGE/包裝	3,000PCS/REEL

CROWN LINK® THE LEADING MANUFACTURER OF FPC & FFC CONNECTOR, HOUSING AND DOME.				
PRODUCT NAME/品名				
1.0mm PITCH WAFER SMT				
PART NO./料號	PIN NUMBER/針數	SCALE/比例	SIZE/圖號	UNIT/單位
CL1006S-XXSNH	02-06 PIN	3:1	A4	mm
MATERIAL/材質	COLOR/顏色	ANGLE OF VIEW/視角	SHEET/頁碼	REV/版本
BRASS GOLD-FLASH PA4T UL 94V-0	BLACK		1 OF 1	A