

4

3


2

1

CROWN LINK®

專業薄膜開關連接器第一品牌

ROHS



- ◆ FOR 1503H HOUSING
- ◆ SPECIFICATIONS
 - VOLTAGE RATING: 150 V AC/DC
 - CURRENT RATING: 3A AC / DC
 - CONTACT RESISTANCE: 20 mΩ MAX
 - INSULATION RESISTANCE: 1000 MΩ MIN
 - WITHSTANDING VOLTAGE: 500V AC / MINUTE



- ◆ ENVIRONMENTAL
 - TEMPERATURE RANGE: -25°C~+85°C

◆ PART NO.





CL1503 S - XX S N H

SMT MOLD NO.
NO LOGO
REEL PACKAGE

SERIES NO. CIRCUITS NUMBER 02 TO 12

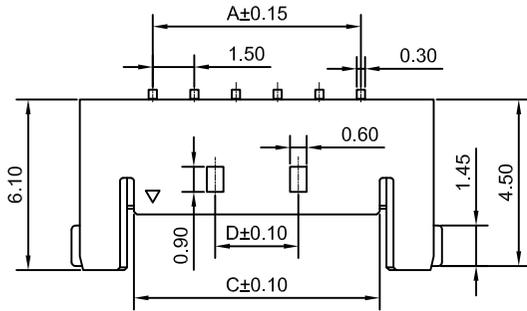

02PIN~04PIN

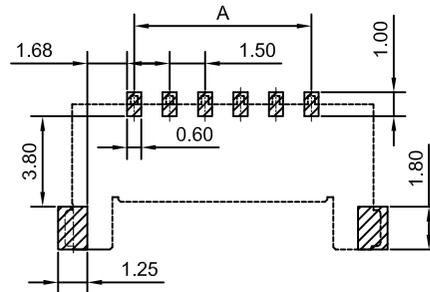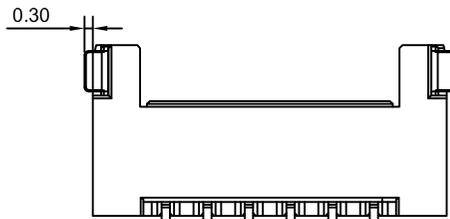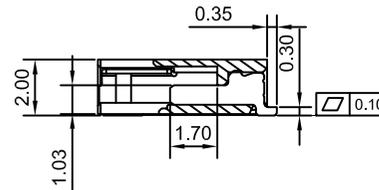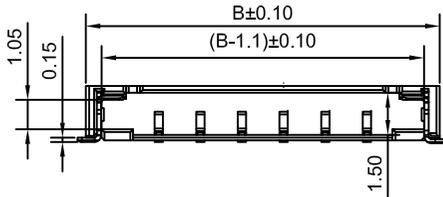

Recommded P.C.B Layout

Part NO.	Dimensions			
	A	B	C	D
02	1.50	6.75	2.85	/
03	3.00	8.25	4.35	/
04	4.50	9.75	5.85	/
05	6.00	11.25	7.35	3.00
06	7.50	12.75	8.85	3.00
07	9.00	14.25	10.35	4.50
08	10.50	15.75	11.85	6.00
09	12.00	17.25	13.35	7.50
10	13.50	18.75	14.85	9.00
11	15.00	20.25	16.35	10.50
12	16.50	21.75	17.85	12.00

REV/版本	MODIFIED CONTENT /變更內容	DRAWN/繪圖	DATE/日期	TOLERANCE RANGE/公差範圍
				.X ±0.30 .X* ±3° .XX ±0.20 .XX* ±2° .XXX ±0.10 .XXX* ±1°

DRAWN/繪圖	DATE/日期
JUDY	2024.06.26
CHECK BY/審查	DATE/日期
VIVIAN	2024.06.26
APPROVED BY/核准	DATE/日期
WENDY	2024.06.26
PACKAGE/包裝	2,000PCS/REEL

CROWN LINK® THE LEADING MANUFACTURER OF FPC & FFC CONNECTOR, HOUSING AND DOME.					
PRODUCT NAME/品名					
1.5mm PITCH WAFER SMT					
PART NO./料號	PIN NUMBER/針數	SCALE/比例	SIZE/圖號	UNIT/單位	
CL1503S-XXSNH	2-12 PIN	3:1	A4	mm	
MATERIAL/材質	COLOR/顏色	ANGLE OF VIEW/視角	SHEET/頁碼	REV/版本	
BRASS GOLD-FLASH PA4T UL 94V-0	BLACK		1 OF 1	A	