

4

3





2

1

CROWN LINK®

專業薄膜開關連接器第一品牌

ROHS

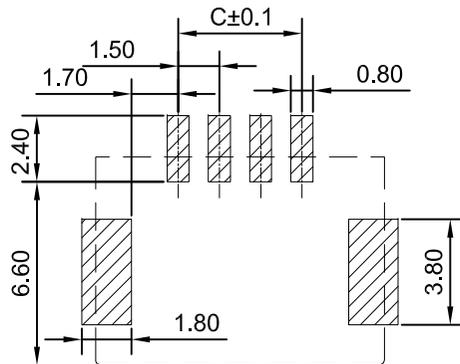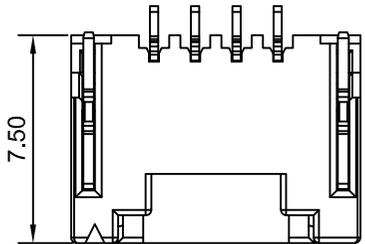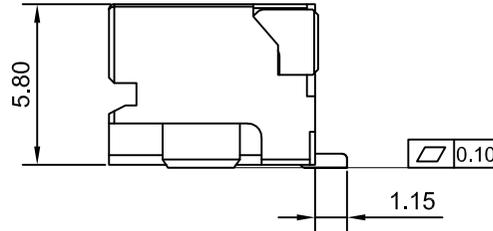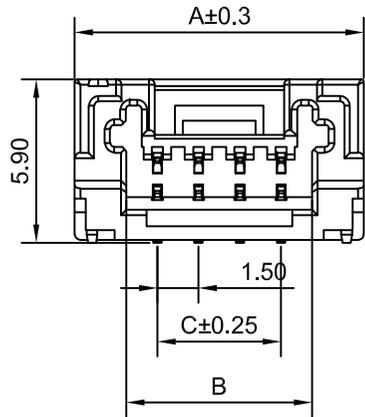

- ◆ FOR 1504HL HOUSING
- ◆ SPECIFICATIONS
 - VOLTAGE RATING: 125V AC,DC
 - CURRENT RATING: 2A AC,DC
 - CONTACT RESISTANCE: 20 mΩ MAX
 - INSULATION RESISTANCE: 500 MΩ MIN
 - WITHSTANDING VOLTAGE: 500V AC / MINUTE
- ◆ ENVIRONMENTAL
 - TEMPERATURE RANGE: -40°C~+105°C

◆ PART NO.

CL1504 S - XX W N H

SMT MOLD NO.

NO LOGO

LYING DOWN

SERIES NO. CIRCUITS NUMBER 02 TO 16

Part NO.	Dimensions			Part NO.	Dimensions		
	A	B	C		A	B	C
02	7.50	3.75	1.50	10	19.50	15.75	13.50
03	9.00	5.25	3.00	11	21.00	17.25	15.00
04	10.50	6.75	4.50	12	22.50	18.75	16.50
05	12.00	8.25	6.00	13	24.00	20.25	18.00
06	13.50	9.75	7.50	14	25.50	21.75	19.50
07	15.00	11.25	9.00	15	27.00	23.25	21.00
08	16.50	12.75	10.50	16	28.50	24.75	22.50
09	18.00	14.25	12.00				

P.C.B LAYOUT

REV/版本	MODIFIED CONTENT /變更內容	DRAWN/繪圖	DATE/日期	TOLERANCE RANGE/公差範圍

DRAWN/繪圖	DATE/日期	CROWN LINK® THE LEADING MANUFACTURER OF FPC & FFC CONNECTOR, HOUSING AND DOME.				
JUDY	2024.06.28	PRODUCT NAME/品名 1.50mm PITCH SMT WAFER				
CHECK BY/審查	DATE/日期	PART NO./料號	PIN NUMBER/針數	SCALE/比例	SIZE/圖號	UNIT/單位
VIVIAN	2024.06.28	CL1504S-XXWNH	02-16 PIN	5:1	A4	mm
APPROVED BY/核准	DATE/日期	MATERIAL/材質	COLOR/顏色	ANGLE OF VIEW/視角	SHEET/頁碼	REV/版本
JASON	2024.06.28	PA9T UL94V-0	NATURAL	1 OF 1	1 OF 1	A
PACKAGE/包裝	1,000PCS/REEL	PHOSPHOROUS BRONZE TIN				