

4

3






2

1

CROWN LINK[®]

專業薄膜開關連接器第一品牌

ROHS

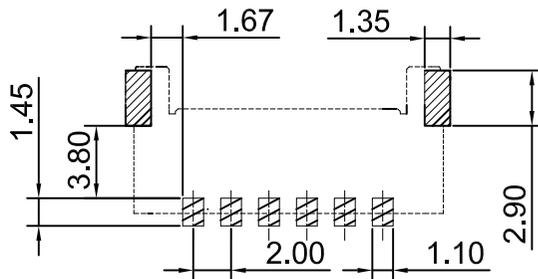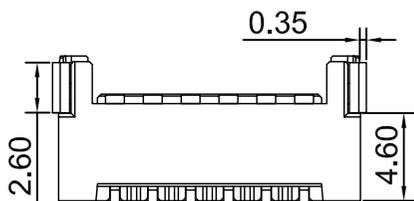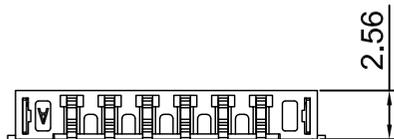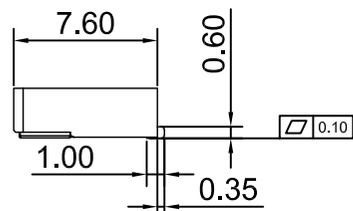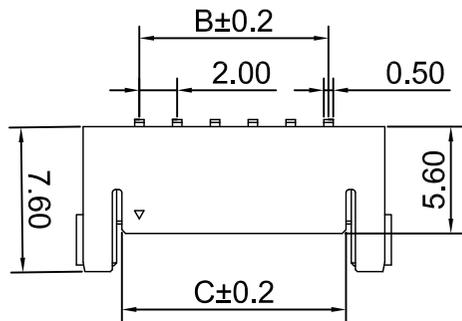

Recommnded P.C.B Layout


- ◆ FOR 2016H HOUSING
- ◆ SPECIFICATIONS
 - VOLTAGE RATING: 250 V AC/DC
 - CURRENT RATING: 6.5A AC / DC
 - CONTACT RESISTANCE: 20 mΩ MAX
 - INSULATION RESISTANCE: 1000 MΩ MIN
 - WITHSTANDING VOLTAGE: 800V AC / MINUTE
- ◆ ENVIRONMENTAL
 - TEMPERATURE RANGE: -25°C~+85°C

◆ PART NO.

CL2016 S - XX S N H

SMT MOLD NO.
NO LOGO
REEL PACKAGE

SERIES NO. CIRCUITS NUMBER 02 TO 06



Part NO.	Dimensions		
	A	B	C
02	7.95	2.00	3.85
03	9.95	4.00	5.85
04	11.95	6.00	7.85
05	13.95	8.00	9.85
06	15.95	10.00	11.85

REV/版本	MODIFIED CONTENT /變更內容	DRAWN/繪圖	DATE/日期	TOLERANCE RANGE/公差範圍
				.X ±0.30 .X° ±3° .XX ±0.20 .XX° ±2° .XXX ±0.10 .XXX° ±1°

DRAWN/繪圖 JUDY 2024.07.04	DATE/日期 2024.07.04	CROWN LINK[®] THE LEADING MANUFACTURER OF FPC & FFC CONNECTOR, HOUSING AND DOME.			
CHECK BY/審查 VIVIAN 2024.07.04	DATE/日期 2024.07.04	PRODUCT NAME/品名 2.0mm PITCH WAFER SMT			
APPROVED BY/核准 WENDY 2024.07.04	DATE/日期 2024.07.04	PART NO./料號 CL2016S-XXSNH	PIN NUMBER/針數 02-06 PIN	SCALE/比例 3:1	SIZE/圖號 A4
PACKAGE/包裝 1,800PCS/REEL		MATERIAL/材質 BRASS GOLD-FLASH PA4T UL 94V-0	COLOR/顏色 BLACK	ANGLE OF VIEW/視角 	UNIT/單位 mm
				SHEET/頁碼 1 OF 1	REV/版本 A