

4

3



2

1

CROWN LINK®

專業薄膜開關連接器第一品牌





ROHS

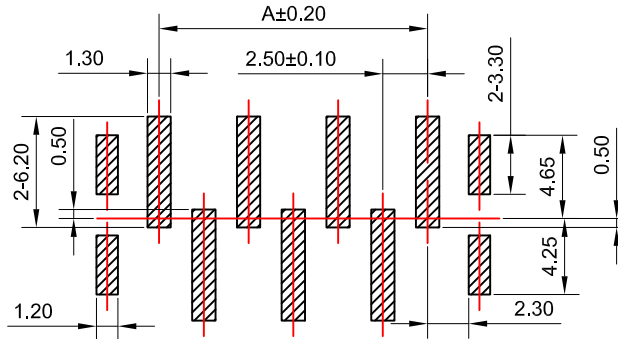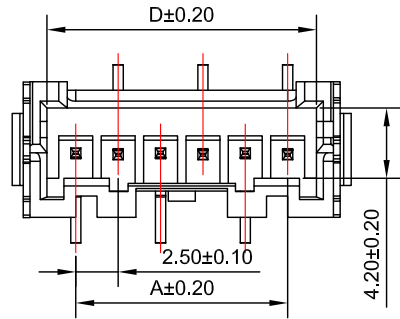


P.C.B LAYOUT

- ◆ FOR 2506HL HOUSING
- ◆ SPECIFICATIONS
 - VOLTAGE RATING: 250V AC,DC
 - CURRENT RATING: 3A AC,DC
 - CONTACT RESISTANCE: 20 mΩ MAX
 - INSULATION RESISTANCE: 1000 MΩ MIN
 - WITHSTANDING VOLTAGE: 1000V AC / MINUTE
- ◆ ENVIRONMENTAL
 - TEMPERATURE RANGE: -25°C~+85°C


◆ PART NO.
 CL2506 S - XX V N H
 SERIES NO. SMT MOLD NO.
 NO LOGO
 VERTICAL
 CIRCUITS NUMBER 02 TO 15

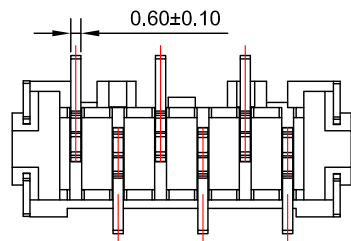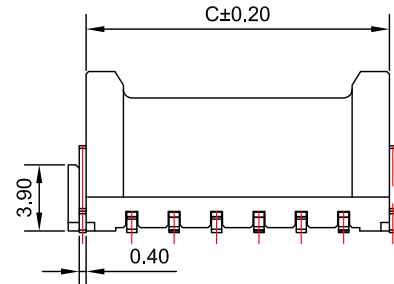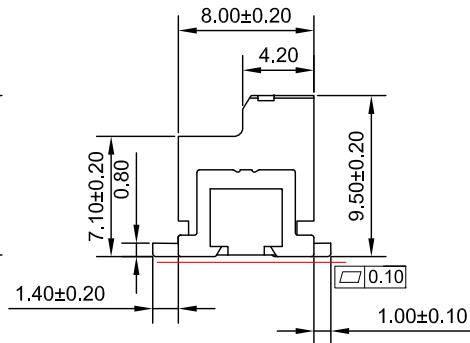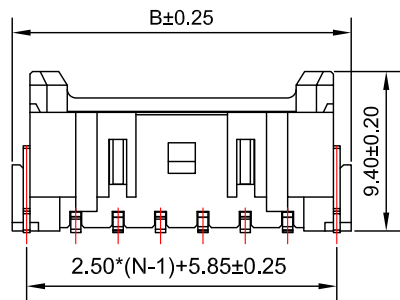

双数PIN位类型



单数PIN位类型



Part No.	Dimensions			
	A	B	C	D
02	2.50	10.00	7.90	6.00
03	5.00	12.50	10.40	8.50
04	7.50	15.00	12.90	11.00
05	10.00	17.50	15.40	13.50
06	12.50	20.00	17.90	16.00
07	15.00	22.50	20.40	18.50
08	17.50	25.00	22.90	21.00
09	20.00	27.50	25.40	23.50
10	22.50	30.00	27.90	26.00
11	25.00	32.50	30.40	28.50
12	27.50	35.00	32.90	31.00
13	30.00	37.50	35.40	33.50
14	32.50	40.00	37.90	36.00
15	35.00	42.50	40.40	38.50

REV/版本	MODIFIED CONTENT /變更內容	DRAWN/繪圖	DATE/日期	TOLERANCE RANGE/公差範圍

DRAWN/繪圖 JUDY	DATE/日期 2023.10.13	CROWN LINK® THE LEADING MANUFACTURER OF FPC & FFC CONNECTOR, HOUSING AND DOME.			
CHECK BY/審查 VIVIAN	DATE/日期 2023.10.13	PRODUCT NAME/品名 2.50mm PITCH SMT WAFER(XA)			
APPROVED BY/核准 JASON	DATE/日期 2023.10.13	PART NO./料號 CL2506S-XXVNH	PIN NUMBER/針數 02-15PIN	SCALE/比例 5:1	SIZE/圖號 A4
PACKAGE/包裝	450PCS/REEL	MATERIAL/材質 BRASS TIN PA6T UL94V-0	COLOR/顏色 NATURAL	ANGLE OF VIEW/視角 ⊕	SHEET/頁碼 1 OF 1
				UNIT/單位 mm	REV/版本 A