

4

3




2

1

# CROWN LINK®

專業薄膜開關連接器第一品牌

ROHS

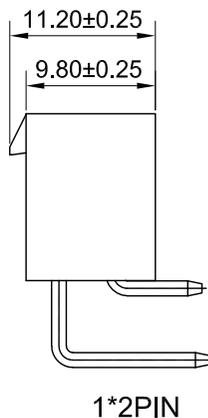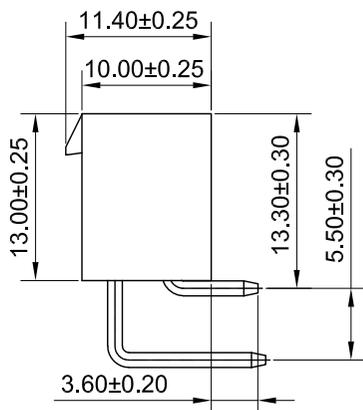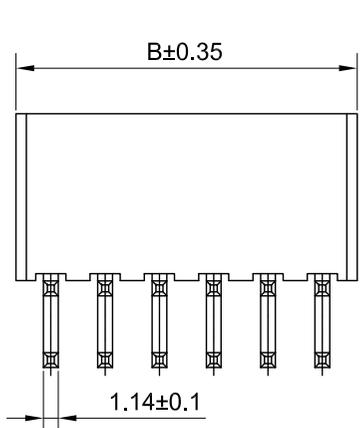





### SPECIFICATIONS

- VOLTAGE RATING: 600V AC,DC
- CURRENT RATING: 7A AC,DC
- CONTACT RESISTANCE: 20 mΩ MAX
- INSULATION RESISTANCE: 1000 MΩ MIN
- WITHSTANDING VOLTAGE: 1500V AC/MINUTE

### ENVIRONMENTAL

- TEMPERATURE RANGE: -25°C~+85°C

### PART NO.

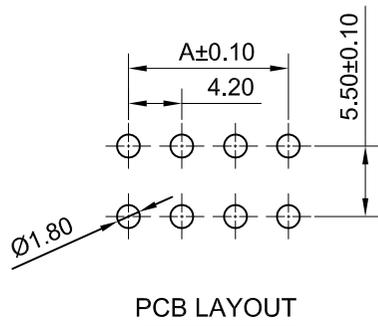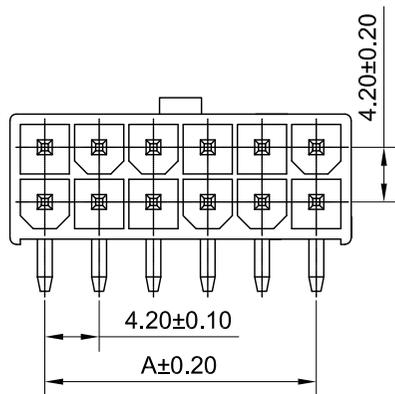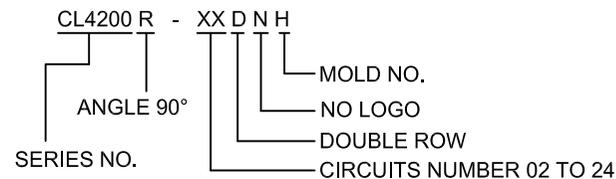

PIN NO.	A	B	PIN NO.	A	B
02	/	5.40	14	25.20	30.60
04	4.20	9.60	16	29.40	34.80
06	8.40	13.80	18	33.60	39.00
08	12.60	18.00	20	37.80	43.20
10	16.80	22.20	22	42.00	47.40
12	21.00	26.40	24	46.20	51.60

DRAWN/繪圖	DATE/日期	<b>CROWN LINK® THE LEADING MANUFACTURER OF FPC &amp; FFC CONNECTOR, HOUSING AND DOME.</b>			
JUDY	2024.05.24	PRODUCT NAME/品名			
CHECK BY/審查	DATE/日期	4.20mm DOUBLE ROW PITCH 90° WAFER			
VIVIAN	2024.05.24	PART NO./料號	PIN NUMBER/針數	SCALE/比例	SIZE/圖號
APPROVED BY/核准	DATE/日期	CL4200R-XXDNH	2-24 PIN	3:1	A4
JASON	2024.05.24	MATERIAL/材質	COLOR/顏色	ANGLE OF VIEW/視角	SHEET/頁碼
PACKAGE/包裝	2,000/BAG	BRASS BRIGHT TIN & NY66 UL 94V-0	NATURE		1 OF 1
TOLERANCE RANGE/公差範圍		REV/版本			
		A			

REV/版本	MODIFIED CONTENT /變更內容	DRAWN/繪圖	DATE/日期	TOLERANCE RANGE/公差範圍
				X. ±0.30 X.* ±2* X ±0.20 X.* ±1* .XX ±0.15 .XX* ±0.5* .XXX ±0.10 .XXX* ±0.5*