

4

3



2

1

CROWN LINK[®]

專業薄膜開關連接器第一品牌

RoHS

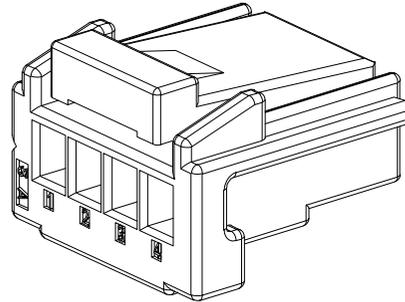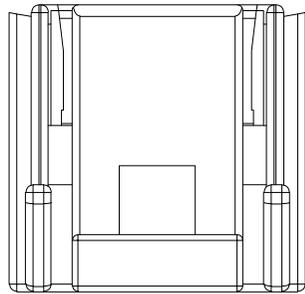

- ◆ FOR 1504 SERIES CONNECTOR
- ◆ SPECIFICATIONS
 - VOLTAGE RATING: 125V AC,DC
 - CURRENT RATING: 2A AC,DC
 - CONTACT RESISTANCE: 20mΩ MAX
 - INSULATION RESISTANCE: 500 MΩ MIN.

- ◆ ENVIRONMENTAL
 - TEMPERATURE RANGE: -40°C~+105°C
 - WITHSAND VOLTAGE: 500 V AC / MINUTE

◆ PART NO.
 1504HL - XX NH



| | | |

SERIES NO. MOLD NO.

| |

NO LOGO

CIRCUITS NUMBER 02 TO 16

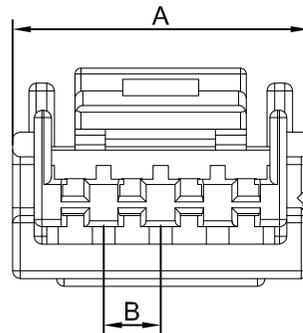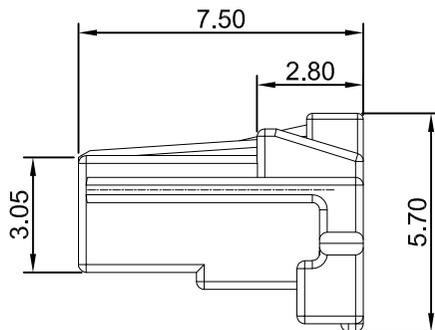

Part NO.	Dimensions		Part NO.	Dimensions	
	A	B		A	B
02	5.00	1.50	10	16.80	13.50
03	6.30	3.00	11	18.30	15.00
04	7.80	4.50	12	19.80	16.50
05	9.30	6.00	13	21.30	18.00
06	10.80	7.50	14	22.80	19.50
07	12.30	9.00	15	24.30	21.00
08	13.80	10.50	16	25.80	22.50
09	15.30	12.00			

REV/版本	MODIFIED CONTENT /變更內容	DRAWN/繪圖	DATE/日期	TOLERANCE RANGE/公差範圍
				.X ±0.30 .X° ±3° .XX ±0.20 .XX° ±2° .XXX ±0.10 .XXX° ±1°

DRAWN/繪圖	DATE/日期	CROWN LINK[®] THE LEADING MANUFACTURER OF FPC & FFC CONNECTOR, HOUSING AND DOME.				
JUDY	2024.06.28	PRODUCT NAME/品名				
CHECK BY/審查	DATE/日期	1.50mm HOUSING FOR CABLE				
VIVIAN	2024.06.28	PART NO./料號	PIN NUMBER/針數	SCALE/比例	SIZE/圖號	UNIT/單位
APPROVED BY/核准	DATE/日期	1504HL - XXNH	02-16 PIN	8:1	A4	mm
JASON	2024.06.28	MATERIAL/材質	COLOR/顏色	ANGLE OF VIEW/視角	SHEET/頁碼	REV/版本
PACKAGE/包裝		PBT UL 94V - 0	WHITE	⊙	1 OF 1	A
	1,000/BAG					