
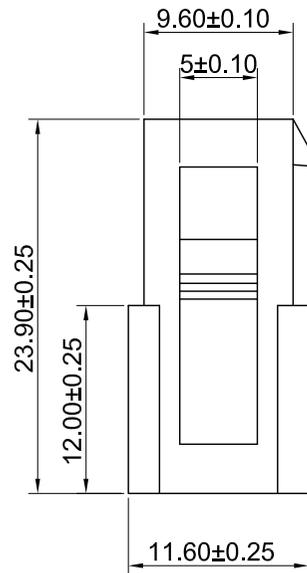


# CROWN LINK<sup>®</sup>

專業薄膜開關連接器第一品牌


RoHS

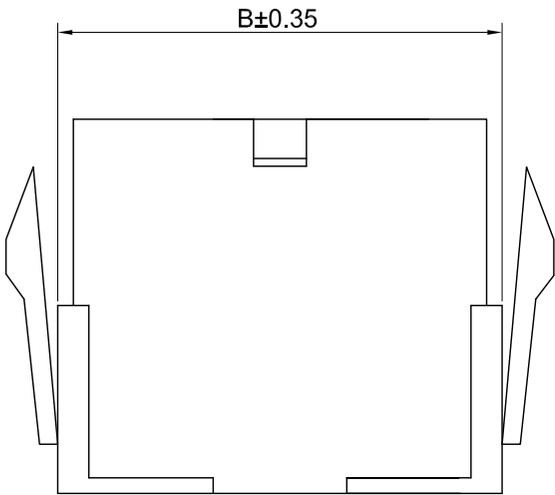

- ◆ FOR 4200 SERIES CONNECTOR
- ◆ SPECIFICATIONS
  - VOLTAGE RATING: 600V AC , DC
  - CURRENT RATING: 7A AC , DC
  - CONTACT RESISTANCE: 20mΩ MAX
  - INSULATION RESISTANCE: 1000 MΩ MIN.
- ◆ ENVIRONMENTAL
  - TEMPERATURE RANGE: -25°C~+85°C
  - WITHSAND VOLTAGE: 1500V AC / MINUTE
- ◆ PART NO.
 

4200H	- XX	D	F	H
SERIES NO.		MOLD NO.	FEMALE	DOUBLE ROW

CIRCUITS NUMBER 02 TO 24

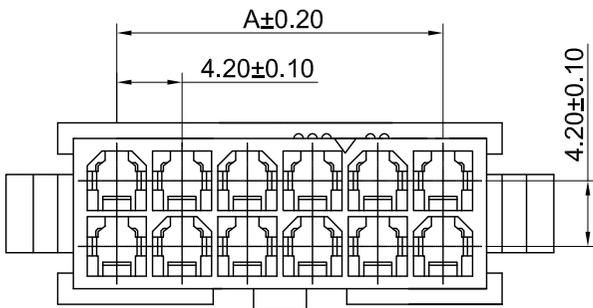

PIN NO.	A	B	PIN NO.	A	B
02	/	7.60	14	25.20	32.80
04	4.20	11.80	16	29.40	37.00
06	8.40	16.00	18	33.60	41.20
08	12.60	20.20	20	37.80	45.40
10	16.80	24.40	22	42.00	49.60
12	21.00	28.60	24	46.20	53.80

REV/版本	MODIFIED CONTENT /變更內容	DRAWN/繪圖	DATE/日期

X: ±0.30 X*: ±2"
.X ±0.20 .X*: ±1"
.XX ±0.15 .XX*: ±0.5"
.XXX ±0.10 .XXX*: ±0.5"
TOLERANCE RANGE/公差範圍

DRAWN/繪圖	DATE/日期
JUDY	2024.05.24
CHECK BY/審查	DATE/日期
VIVIAN	2024.05.24
APPROVED BY/核准	DATE/日期
JASON	2024.05.24
PACKAGE/包裝	2,000/BAG

<b>CROWN LINK<sup>®</sup> THE LEADING MANUFACTURER OF FPC &amp; FFC CONNECTOR, HOUSING AND DOME.</b>					
PRODUCT NAME/品名					
4.2mm PITCH HOUSING FOR FFC/FPC					
PART NO./料號	PIN NUMBER/針數	SCALE/比例	SIZE/圖號	UNIT/單位	
4200H-XXDFH	02-24 PIN	2:1	A4	mm	
MATERIAL/材質	COLOR/顏色	ANGLE OF VIEW/視角	SHEET/頁碼	REV/版本	
NY66 UL94V - 0	NATURE		1 OF 1	A	