

4

3




2

1


# CROWN LINK®

專業薄膜開關連接器第一品牌

ROHS

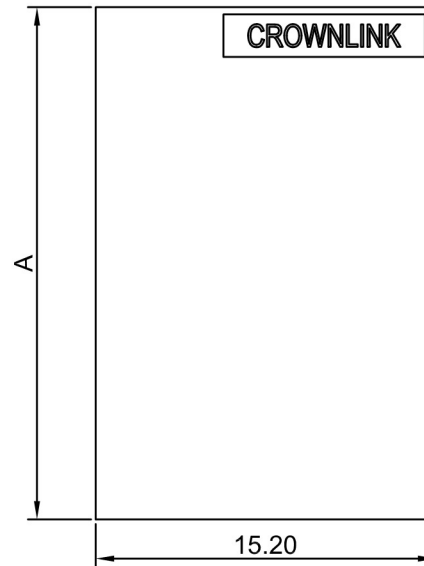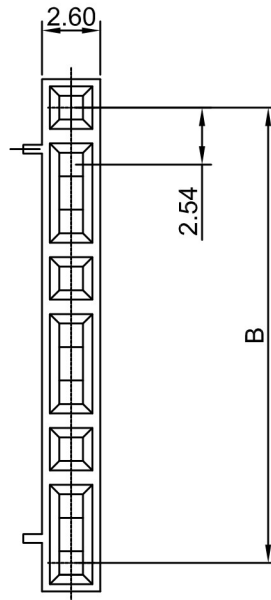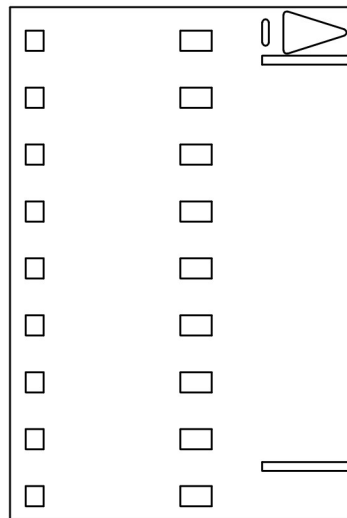

- ◆ FOR 2804 SERIES CONNECTOR
- ◆ SPECIFICATIONS
  - VOLTAGE RATING: 250 VAC RMS
  - CURRENT RATING: 2A
  - INSULATION RESISTANCE: 500 MΩ
- ◆ ENVIRONMENTAL
  - TEMPERATURE RANGE: -25°C~+85°C
- ◆ DIMENSION: N=CIRCUIT NO.
  - A=2.54\*N
  - B=2.54\*(N-1)
- ◆ PART NO.
  - 2804HS - XX
  - SERIES NO.
  - CIRCUITS NUMBER 04 TO 26



				.X ±0.25
				.XX ±0.10
				ANG. ±2°
A	FIRST DRAWING	UNA	2018.06.11	
REV/版本	MODIFIED CONTENT /變更內容	DRAWN/繪圖	DATE/日期	TOLERANCE RANGE/公差範圍

DRAWN/繪圖	DATE/日期	<b>CROWN LINK® THE LEADING MANUFACTURER OF FPC &amp; FFC CONNECTOR, HOUSING AND DOME.</b>				
UNA	2018.06.11	PRODUCT NAME/品名 2.54mm PITCH HOUSING FOR FFC/FPC				
CHECK BY/審查	DATE/日期	PART NO./料號	PIN NUMBER/針數	SCALE/比例	SIZE/圖號	UNIT/單位
JASON	2018.06.11	2804HS-XX	4-26PIN		A4	mm
APPROVED BY/核准	DATE/日期	MATERIAL/材質	COLOR/顏色	ANGLE OF VIEW/視角	SHEET/頁碼	REV/版本
WENDY	2018.06.11	PBT	BLACK COLOR		1 OF 1	A
PACKAGE/包裝	4-6PIN 1000PCS/Bag 7-13PIN 500PCS/Bag 14-26PIN 250PCS/Bag					