

4

3



2

1

# CROWN LINK®



專業薄膜開關連接器第一品牌

ROHS

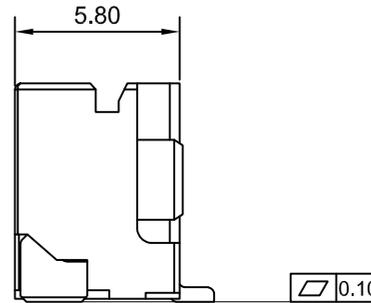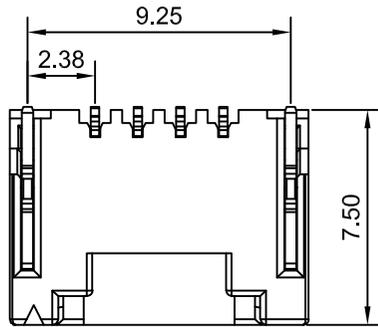

- ◆ FOR 1504HL HOUSING
- ◆ SPECIFICATIONS
  - VOLTAGE RATING: 125V AC,DC
  - CURRENT RATING: 2A AC,DC
  - CONTACT RESISTANCE: 20 mΩ MAX
  - INSULATION RESISTANCE: 500 MΩ MIN
  - WITHSTANDING VOLTAGE: 500V AC / MINUTE
- ◆ ENVIRONMENTAL
  - TEMPERATURE RANGE: -40°C~+105°C

◆ PART NO.  
 CL1504 S - XX V N H  
 SMT MOLD NO.  
 NO LOGO  
 VERTICAL  
 SERIES NO. CIRCUITS NUMBER 02 TO 16

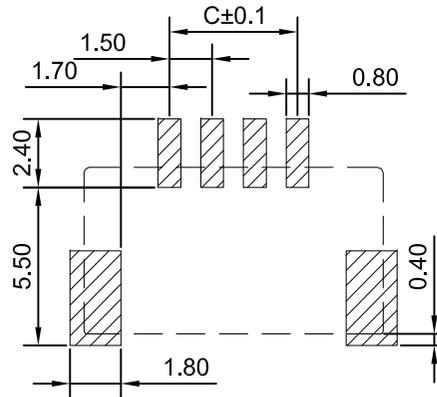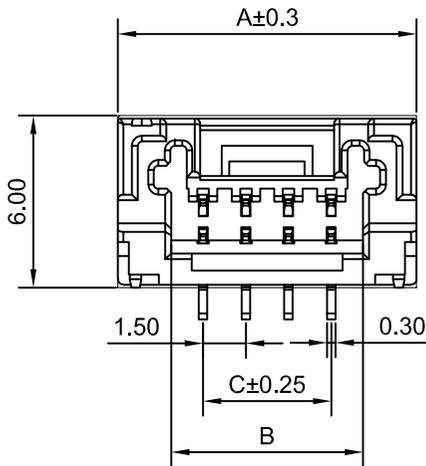

P.C.B LAYOUT

Part NO.	Dimensions			Part NO.	Dimensions		
	A	B	C		A	B	C
02	7.50	3.75	1.50	10	19.50	15.75	13.50
03	9.00	5.25	3.00	11	21.00	17.25	15.00
04	10.50	6.75	4.50	12	22.50	18.75	16.50
05	12.00	8.25	6.00	13	24.00	20.25	18.00
06	13.50	9.75	7.50	14	25.50	21.75	19.50
07	15.00	11.25	9.00	15	27.00	23.25	21.00
08	16.50	12.75	10.50	16	28.50	24.75	22.50
09	18.00	14.25	12.00				

REV/版本	MODIFIED CONTENT /變更內容	DRAWN/繪圖	DATE/日期

TOLERANCE RANGE/公差範圍  
 .X ±0.30 .X° ±3°  
 .XX ±0.20 .XX° ±2°  
 .XXX ±0.10 .XXX° ±1°

DRAWN/繪圖 JUDY	DATE/日期 2024.06.28
CHECK BY/審查 VIVIAN	DATE/日期 2024.06.28
APPROVED BY/核准 JASON	DATE/日期 2024.06.28
PACKAGE/包裝	1,000PCS/REEL

<b>CROWN LINK® THE LEADING MANUFACTURER OF FPC &amp; FFC CONNECTOR, HOUSING AND DOME.</b>					
PRODUCT NAME/品名 1.50mm PITCH SMT WAFER					
PART NO./料號 CL1504S-XXVNH	PIN NUMBER/針數 02-16 PIN	SCALE/比例 5:1	SIZE/圖號 A4	UNIT/單位 mm	
MATERIAL/材質 PA9T UL94V-0 PHOSPHOROUS BRONZE TIN	COLOR/顏色 NATURAL	ANGLE OF VIEW/視角 	SHEET/頁碼 1 OF 1	REV/版本 A	