

4

3



2

1




CROWN LINK[®]

專業薄膜開關連接器第一品牌

ROHS

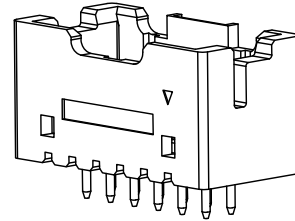
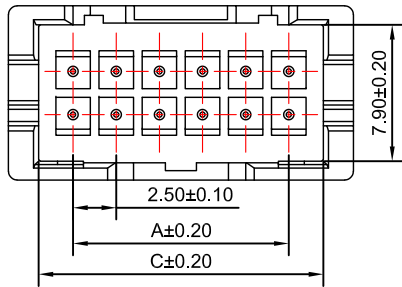


- ◆ FOR 2506HL HOUSING
- ◆ SPECIFICATIONS
 - VOLTAGE RATING: 250V AC, DC
 - CURRENT RATING: 3A AC, DC
 - CONTACT RESISTANCE: 20 mΩ MAX
 - INSULATION RESISTANCE: 1000 MΩ MIN
 - WITHSTANDING VOLTAGE: 1000V AC / MINUTE

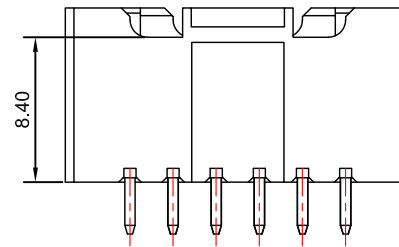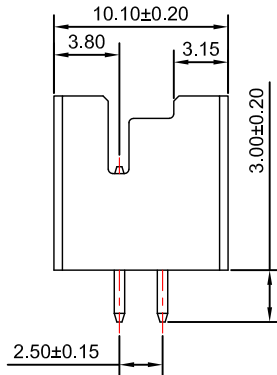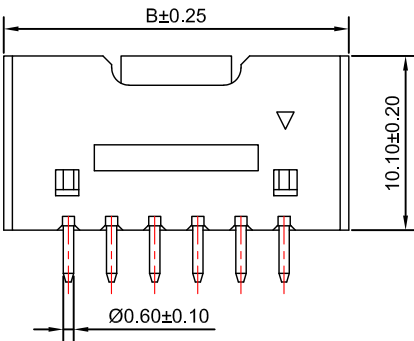

- ◆ ENVIRONMENTAL
 - TEMPERATURE RANGE: -25°C ~ +85°C

◆ PART NO.

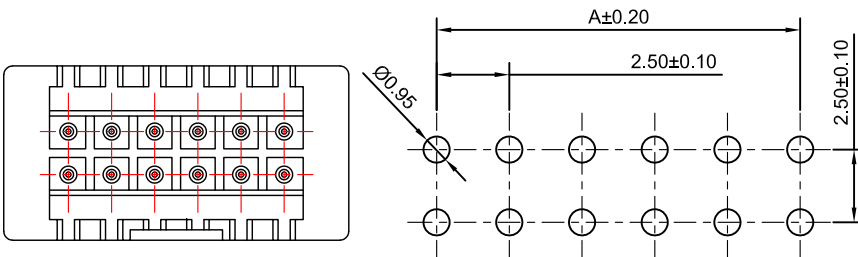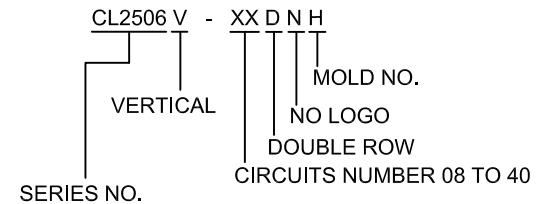

P.C.B LAYOUT

Part NO.	Dimensions			Part NO.	Dimensions		
	A	B	C		A	B	C
8	7.50	15.00	11.50	26	30.00	37.50	34.00
10	10.00	17.50	14.00	28	32.50	40.00	36.50
12	12.50	20.00	16.50	30	35.00	42.50	39.00
14	15.00	22.50	19.00	32	37.50	45.00	41.50
16	17.50	25.00	21.50	34	40.00	47.50	44.00
18	20.00	27.50	24.00	36	42.50	50.00	46.50
20	22.50	30.00	26.50	38	45.00	52.50	49.00
22	25.00	32.50	29.00	40	47.50	55.00	51.50
24	27.50	35.00	31.50				

REV/版本	MODIFIED CONTENT /變更內容	DRAWN/繪圖	DATE/日期	TOLERANCE RANGE/公差範圍
				X ±0.30 X* ±2° X ±0.30 X* ±2° .XX ±0.20 .XX* ±1° .XXX ±0.10 .XXX* ±0.5°

DRAWN/繪圖 JUDY	DATE/日期 2023.10.13	CROWN LINK[®] THE LEADING MANUFACTURER OF FPC & FFC CONNECTOR, HOUSING AND DOME.				
CHECK BY/審查 VIVIAN	DATE/日期 2023.10.13	PRODUCT NAME/品名 2.50mm PITCH VERTICAL WAFER(XA)				
APPROVED BY/核准 WENDY	DATE/日期 2023.10.13	PART NO./料號 CL2506V-XXDNH	PIN NUMBER/針數 08-40PIN	SCALE/比例 3:1	SIZE/圖號 A4	UNIT/單位 mm
PACKAGE/包裝	2,000PCS/BAG	MATERIAL/材質 BRASS TIN PA46UL94V-0	COLOR/顏色 NATURAL	ANGLE OF VIEW/視角 	SHEET/頁碼 1 OF 1	REV/版本 C